

SONOMA™ 5' x 30"
BATHTUB with INTEGRAL APRON

- 1752112 Soaker Tub, Right Hand Outlet
- 1752212 Soaker Tub, Left Hand Outlet

Product Features:

- High gloss acrylic surface with fiberglass reinforcement
- Integral apron for alcove installation
- Integral three-sided, tiling/water retention flange
- Lower deck height for easier entry/exit
- Above floor rough
- Shallower soaker suited for bathing children
- Standard sized drain locations for ease of retrofit
- Contemporary design

Nominal Dimensions:

1530 x 768 x 381mm
(60-1/4" x 30-1/4" x 15")

**Compliance Certifications -
Meets or Exceeds the Following Specifications:**

- CSA B45.5-11/IAPMO Z124-2011



SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS



To Be Specified - Required:

- Colour:
- Bath Faucet: (specify finish)
- Bath Drain: 1583.470 (specify finish)

For colour/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

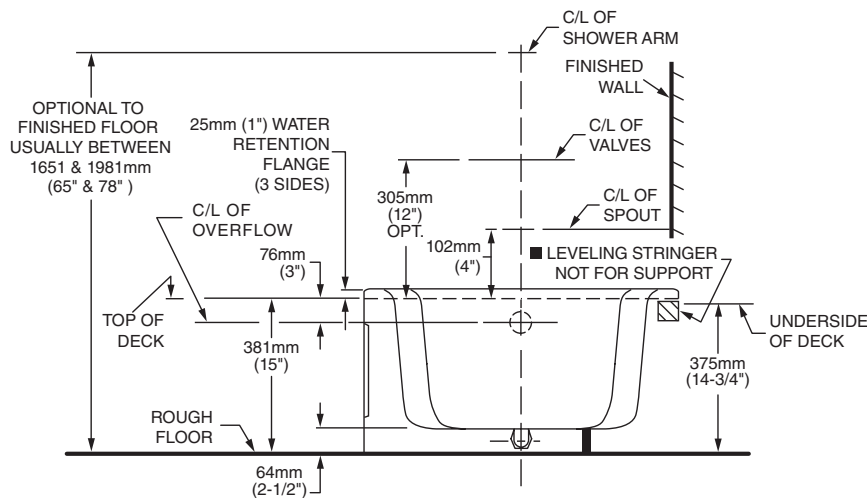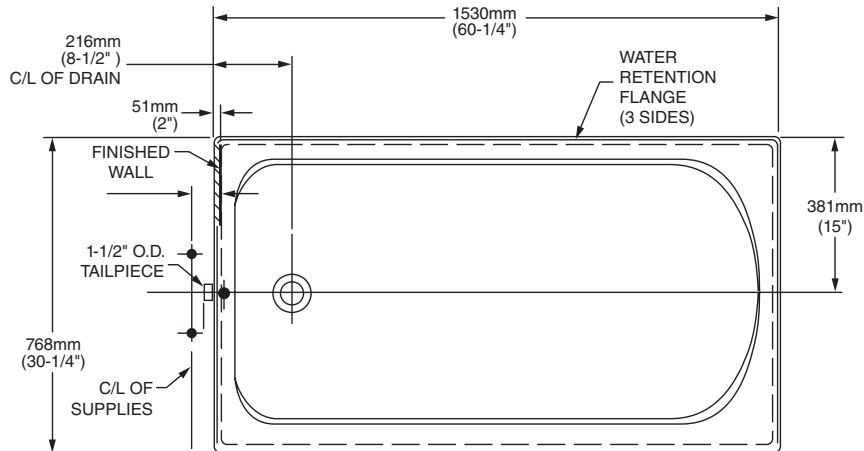

GENERAL SPECIFICATIONS FOR 1752 BATHING POOL	
INSTALLED SIZE	1530 x 768 x 381mm (60-1/4" x 30-1/4" x 15")
WEIGHT	30 Kgs. (65 Lbs.)
WEIGHT w/WATER	142 Kgs. (313 Lbs.)
GAL. TO OVERFLOW	117 L (31 Gal.)
BATHING WELL AT SUMP	540 x 1245mm (21-1/4" x 49")
BATHING WELL AT RIM	578 x 1378mm (22-3/4" x 54-1/4")
WATER DEPTH TO OVERFLOW	200mm (7-7/8")
FLOOR LOADING	120 Kgs./Sq.m (24.7 Lbs./Sq.Ft.)
(PROJECTED AREA)	
PTS.	7.86
CUBE (FT ³)	15.8

NOTES:

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH TUB FOR ADDITIONAL INFORMATION.

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (1752112).

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standards Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.